TECHNICAL DATA SHEET

MONEX SUPREME TECH 10W-30

DESCRIPTION

MONEX 10W- 30 is a full synthetic motor oil engineered with superior performance on a wide range of engines of passenger cars, vans and light trucks. Providing outstanding wear and sludge protection, even under the most severe driving conditions.

CHARACTERISTICS

- Excellent low-temperature properties.
- Protection against ring sticking.
- Viscosity maintenance and reduced oil consumption under heavy-duty, high-temperature operating conditions.
- Provide long engine life.

APPLICATION

Recommended for use in diesel engine oils including turbocharged and gasoline fueled vehicles.

PERFORMANCE

- SN/CF, ACEA A1/B1, ILSAC GF-5, MB 228.3, Ford WSS-M2C205-A, Chrysler MS-6395, GM6094M.

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0.874
K. Viscosity @ 40 °C	ASTM D 445	cSt	73
K. Viscosity @ 100 °C	ASTM D 446	cSt	11.3
Viscosity İndex	ASTM D 2270		141
Flash Point	ASTM D 92	°C	220
Pour Point	ASTM D 97	°C	-39

** Values shown may differ between productions*

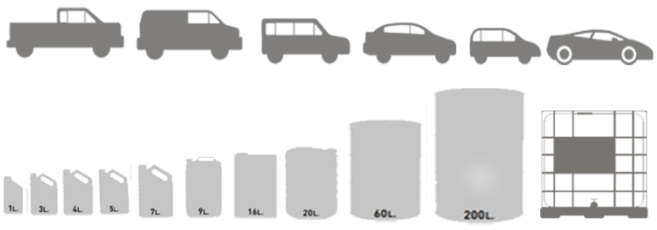

ÖZERŞAH group
info@ozersahenerji.com
www.ozersahgroup.com
+90 262 502 01 97
Çerkeşli Köyü Yolu Üzeri GEBKİM
Kimyacılar OSB, Atatürk Blv. No:4
Dilovası/Kocaeli, Turkey
Haci Sabancı O.S.B Toros Cad.
No:21 Sarıçam/Adana, Turkey.