TECHNICAL DATA SHEET

MONEX ATF CVT

DESCRIPTION

MONEX ATF CVT is a full synthetic lubricant based on a premium selection of high-quality base oils, that has been developed to function on most CVT gearboxes.

CARACTERISTICS

- Provides effective wear protection even at very low temperatures and under high load, so extends the lifetime of the automatic transmission and lowers maintenance costs.
- Minimizes friction and dissipates heat, so provides smooth gear shifting over a wide operating temperature range.
- Outstanding oxidation and shear stability offer reliable performance during long drain intervals.

APPLICATION

MONEX ATF CVT lubricant is suitable for continuously variable transmissions, using steel push-belts or chains.

PERFORMANCE

DEX-CVT
VW G 052 180, VW G 052 516

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,865
K. Viscosity @ 40 °C	ASTM D 445	cSt	34,9
K. Viscosity @ 100 °C	ASTM D 446	cSt	6,85
Viscosity İndex	ASTM D 2270		160
Flash Point	ASTM D 92	°C	220
Pour Point	ASTM D 97	°C	-42

** Values shown may differ between productions*

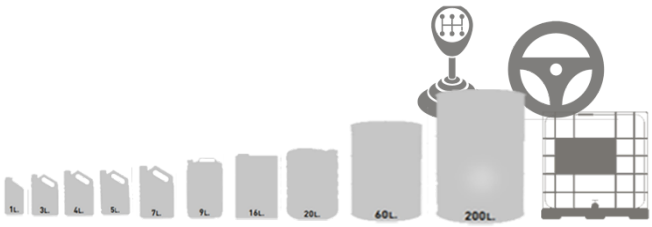

ÖZERŞAH group
info@ozersahenerji.com
www.ozersahgroup.com
+90 262 502 01 97
Çerkeşli Köyü Yolu Üzeri GEBKİM Kimyacılar OSB, Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey
Haci Sabancı O.S.B Toros Cad. No:21 Sarıçam/Adana, Turkey.