TECHNICAL DATA SHEET

MONEX ATF VI

DESCRIPTION

ATF VI DEXRON is a low viscosity, high performance synthetic transmission fluid that meets GM Dexron VI, Ford Mercon LV, and JASO 1-A LV specifications.

CARACTERISTICS

- Low viscosity formula provides fuel efficiency.
- It reduces maintenance costs and extends automatic transmission's life at low temperatures and under extreme road conditions while providing excellent protection against wear.
- Reduces friction and heat, so provides smooth gear shift over wide operating temperature range.
- Superior oxidation stability and shear stability.

APPLICATION

It is used in automatic transmissions and power steering systems of passenger cars and commercial vehicles where GM Dexron VI, Ford Mercon LV and JASO 1-A LV are required. It is also suitable for use in hydraulic power systems where an automatic transmission fluid is specified.

PERFORMANCE

GM: DEXRON VI, JASO 1-A LV

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,880
K. Viscosity @ 40 °C	ASTM D 445	cSt	51,35
K. Viscosity @ 100 °C	ASTM D 446	cSt	7,62
Viscosity İndex	ASTM D 2270		112

** Values shown may differ between productions*

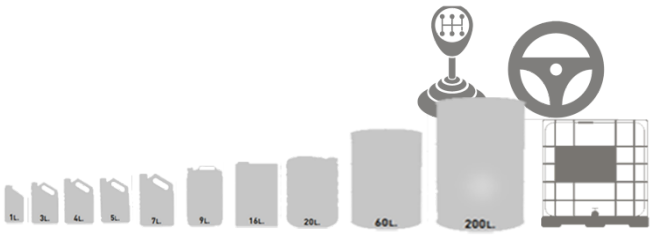

ÖZERŞAH group
info@ozersahenerji.com
www.ozersahgroup.com
+90 262 502 01 97
Çerkeşli Köyü Yolu Üzeri GEBKİM Kimyacılar OSB, Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey
Haci Sabancı O.S.B Toros Cad. No:21 Sarıçam/Adana, Turkey.